


Rittal – The System.

Faster – better – worldwide.

► Rittal TopTherm cooling units Generation “Blue e”



- Savings of up to 45% energy consumption
- Units with Comfort controller are now “Blue e” – Model Numbers remain unchanged

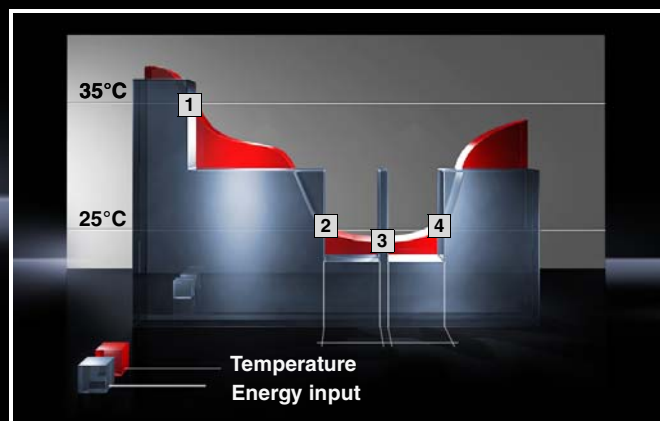

TopTherm cooling units

- Energy-saving range of cooling units in the output range from 500 to 4000 W
- Savings of up to 45% energy consumption with the same cooling output (ideally 70% compared with a conventional Rittal TopTherm Plus cooling unit in field trials)
- www.rittal.com/products/system-climate-control/energysavingcalculator

Eco-mode control

Intelligent, targeted use of energy thanks to the new eco-mode control from Rittal

- 1 Cooling switches off: The interior fan only runs to ensure air circulation inside the enclosure.
- 2 The interior fan is switched off.
- 3 The interior fan is switched on for 30 seconds every 10 minutes to briefly blend the air.
- 4 The interior fan is switched back on.

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

www.rittal.com



Product conversion guide from units with Basic controller to units of the “Blue e” generation.

NEW

- Energy saving up to 45%
- Previous units with Comfort controller are now “Blue e” generation; Model Numbers remain the same

Unchanged

- Identical cut-out dimensions
- Identical output categories
- Identical dimensions

Roof-mounted cooling units

(formerly) with Basic controller

(from now on) Generation “Blue e”



Model No. SK	Useful cooling output	Dimensions W x H x D mm	Voltage V, Hz	Model No. SK
3382.100	500 W	597 x 417 x 380	230, 50/60	3382.500
3382.110			115, 50/60	3382.510
3359.100	750 W	597 x 417 x 380	230, 50/60	3359.500
3359.110			115, 50/60	3359.510
3359.140			400, 2~, 50/60	3359.540
3383.100	1000 W	597 x 417 x 475	230, 50/60	3383.500
3383.110			115, 50/60	3383.510
3383.140			400, 2~, 50/60	3383.540
3384.100	1500 W	597 x 417 x 475	230, 50/60	3384.500
3384.110			115, 50/60	3384.510
3384.140			400, 2~, 50/60	3384.540
3385.100	2000 W	597 x 417 x 475	230, 50/60	3385.500
3385.110			115, 50/60	3385.510
3385.140			400, 2~, 50/60	3385.540
3386.140	3000 W	796 x 470 x 580	400, 3~, 50 460, 3~, 60	3386.540
3387.140	4000 W	796 x 470 x 580	400, 3~, 50 460, 3~, 60	3387.540

Cooling unit versions in stainless steel may be found on the Internet.

Note: An additional system relay is available. For connection diagram, see the latest assembly instructions under www.rittal.com

Wall-mounted cooling units

(formerly) with Basic controller

(from now on) Generation “Blue e”



Model No. SK	Useful cooling output	Dimensions W x H x D mm	Voltage V, Hz	Model No. SK
3303.100	500 W	280 x 550 x 200	230, 50/60	3303.500
3303.110			115, 50/60	3303.510
3361.100	750 W	280 x 550 x 280	230, 50/60	3361.500
3361.110			115, 50/60	3361.510
3361.140			400, 2~, 50/60	3361.540
3304.100	1000 W	400 x 950 x 260	230, 50/60	3304.500
3304.110			115, 50/60	3304.510
3304.140			400, 3~, 50 460, 3~, 60	3304.540
3305.100	1500 W	400 x 950 x 260	230, 50/60	3305.500
3305.110			115, 50/60	3305.510
3305.140			400, 3~, 50 460, 3~, 60	3305.540
3366.100	1500 W	450 x 1590 x 205	230, 50/60	3366.500
3366.110			115, 50/60	3366.510
3366.140			400, 3~, 50 460, 3~, 60	3366.540
3328.100	2000 W	400 x 1580 x 295	230, 50/60	3328.500
3328.110			115, 50/60	3328.510
3328.140			400, 3~, 50 460, 3~, 60	3328.540
3329.100	2500 W	400 x 1580 x 295	230, 50/60	3329.500
3329.110			115, 50/60	3329.510
3329.140			400, 3~, 50 460, 3~, 60	3329.540
3332.140	4000 W	500 x 1580 x 340	400, 3~, 50 460, 3~, 60	3332.540

Cooling unit versions in stainless steel, Nema 4X and with climate control doors may be found on the Internet.

Note: An additional system relay is available. For connection diagram, see the latest assembly instructions under www.rittal.com